

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GJXFH

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

The optical fiber(s) is placed in the center. Two KFRPS are placed at two sides. Then the cable is completed with LSZH sheath.

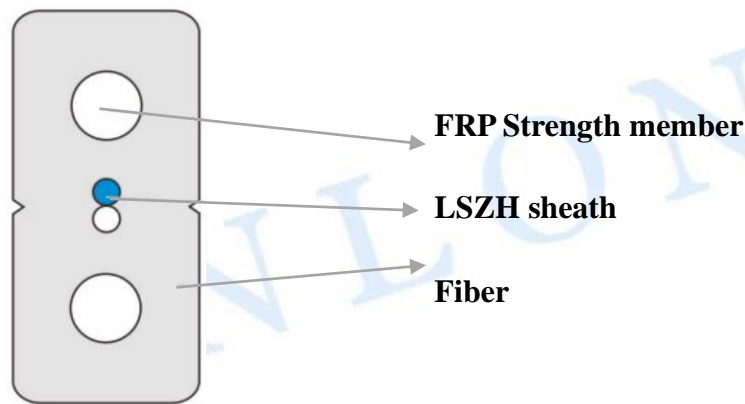

CHARACTERISTICS:

- Simple structure, light weight and high tensile strength.
- Novel groove design, easily strip and splice, simplify the installation and maintenance.
- Low smoke, zero halogen and flame-retardant sheath, environment-friendly, good Safety.

Storage/Operating Temperature	Bending Radius	Static 10xD	Dynamic 20xD
			-20°C~+60°C
Cable Type	GJXFH-1B6a2	GJXFH-2B6a2	
Cable Diameter(mm)	$(2.0 \pm 0.1) \times (3.0 \pm 0.1)$	$(2.0 \pm 0.1) \times (3.0 \pm 0.1)$	
Cable Weight(kg/km)	7.5-	7.5-	
Tensile Strength Long/Short Term(N)	40/80	40/80	
Crush Resistance Long/Short Term(N/100mm)	500/1000	500/1000	

WANLONG CABLE